

Marunaka



BAND SAW


Model

JB-M70

Model

JB-M80

JB-M70 700mm(27½") φ
JB-M80 800mm(31½") φ
(A)Type For Board Sawing
(B)Type For Scroll Work

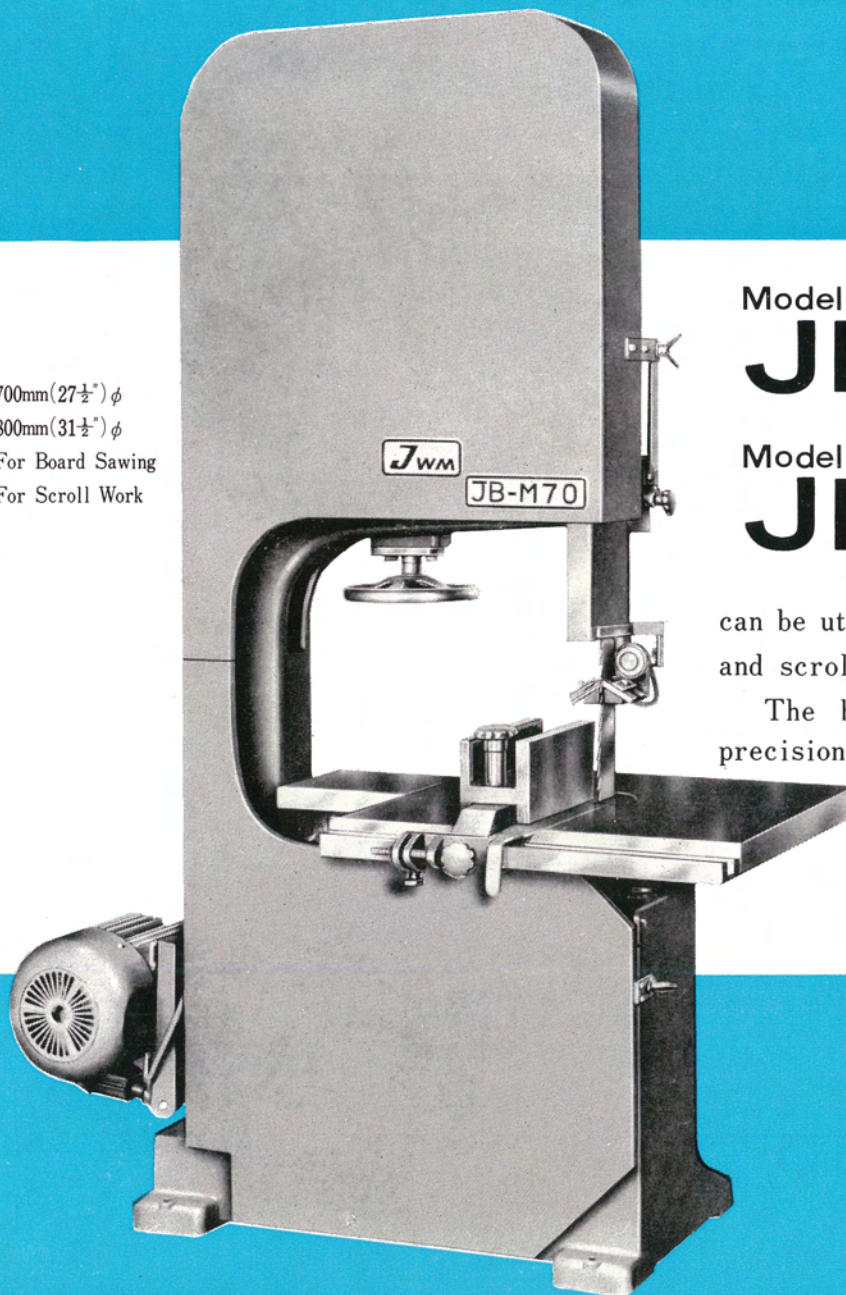

can be utilized for sawing logs, boards and scroll work.

The blade tension device, with precision balanced wheel, will perform with efficiency and accuracy.

Our Band Saw has the highest reputation in the woodwork industry.

MARUNAKA TEKKOSHO INC.

HEAD OFFICE : 96. Wakamatsu-cho. Shizuoka, Japan
PHONE : Shizuoka (0542) 71-7127.3386
CABLE ADDRESS : "SHIZUOKA MARUNAKA"

Marunaka

Model


JB-M70

Model

JB-M80

FEATURES :

- The wheel is dynamically balanced for vibrationless effect and the face is smoothly ground.
 - (A) Type.....25-75-90mm wide saw blade can be used for board sawing.
 - (B) Type.....For scroll work, a fine quality rubber is rapped around the wheel and uses 9~25(40) mm wide saw blade.
- The wheel shaft is supported by a special precision spherical roller bearing.
- The blade guide is specially designed to maintain blade stability and user's safety.
- The table that can be angled 45 degree to the right is available by special order. (B) Type, For Scroll Work.

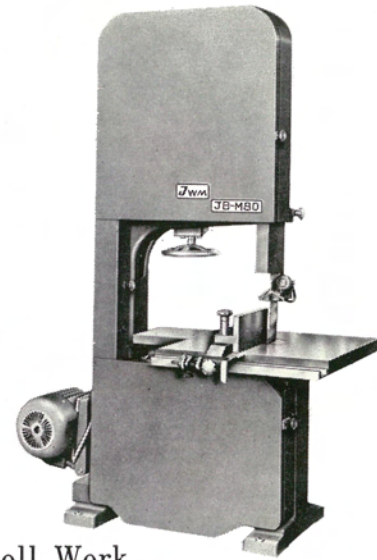

SPECIFICATIONS :

| | | JB-M70 | JB-M80 |
|----------------------------|-----------------|---|---|
| Wheel | Diameter | 700mm (27 $\frac{5}{8}$ ') | 800mm (31 $\frac{1}{2}$ ') |
| | Width (A) Type | (For Logs and Board Sawing) 75mm | (A) Type (For Logs and Board Sawing) 75mm |
| | | (B) Type (For Scroll Work) 40mm (Rubber Rapped) | (B) Type (For Scroll Work) 40mm (Rubber Rapped) |
| | R.P.M. (A) Type | 700-900 r.p.m. | (A) Type 700-900 r.p.m. |
| | | (B) Type 700 r.p.m. | (B) Type 700 r.p.m. |
| Lifting of Upper Wheel | | 100 mm | 100 mm |
| Blade Measurement (A) Type | | W. 75(-90) × L. 4,850mm | (A) Type W. 75(-90) × L. 5,280mm |
| (B) Type | | W. 9-25(-40) × L. 4,850mm | (B) Type W. 9-25(-40) × L. 5,280mm |
| Height & Width to be sawed | | H. 350 × W. 650mm (W : from Saw to Frame) | H. 350 × W. 690mm |
| Table | Size | 700 × 700mm | 750 × 750mm |
| | Height | 870 mm | 870 mm |
| | Tilting Degree | (B) Type can be angled 45 degree to the right. | (B) Type can be angled 45 degree to the right. |
| Electric motor | | 3HP (~5HP ~ 7 $\frac{1}{2}$ HP), 2.2kw (~3.7-4.0~5.5kw) | 3HP (~5HP ~ 7 $\frac{1}{2}$ HP), 2.2kw (~3.7-4.0~5.5kw) |
| Machine Measurement | | W. 1,450 × L. 965 × H. 2,110mm | W. 1,530 × L. 1,000 × H. 2,160mm |
| Packing | Weight | 850 kg | 1,000 kg |
| | Volume | 150 cft. | 200 cft. |

MARUNAKA TEKKOSHO INC.

HEAD OFFICE : 96. Wakamatsu-cho. Shizuoka. Japan
 PHONE : Shizuoka (0542) 71-7127.3386
 CABLE ADDRESS : "SHIZUOKA MARUNAKA"